


CALL 1-800-577-8111 FOR SALES AND SUPPORT  
CLICK HERE TO RETURN TO WEBSITE

## Thermo Scientific Masterflex® P/S Variable-Speed Hazardous-Duty Drives

Ideal for areas that require special electrical precautions.

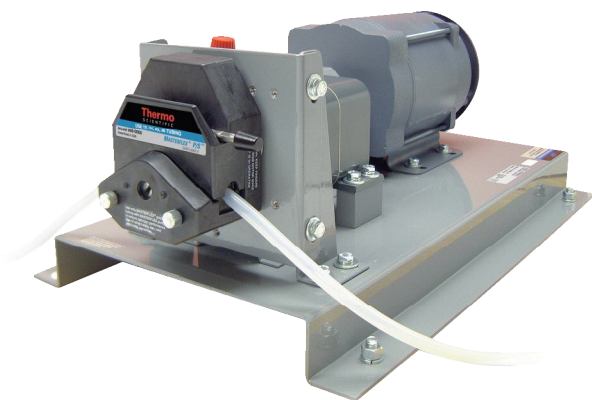

Hazardous-Duty Drive  
955-1730 includes an  
EASY-LOAD® II pump head

### Product Benefits

- Deliver flow rates from 0.6 to 2450 mL/min (up to 40 GPH).
- 230/400V AC, 3-phase motor: EEx-d IIBT4 rating.
- 115 V AC motor: UL-listed for Class 1, Division 1 Group D, and Class 2, Division 1 Groups E, F and G hazardous locations.
- Ideal for areas that require special electrical precautions.



CALL 1-800-577-8111 FOR SALES AND SUPPORT  
CLICK HERE TO RETURN TO WEBSITE

## Specifications & Ordering Information

Catalog Number	955-1630	956-1630	965-1630	955-1730	956-1730	965-1730
Flow capacity (mL/min)	0.6 to 1650	17 to 2075	18 to 2450	0.5 to 1380	14 to 1740	15 to 2040
Included pump head	Easy-Load® II (thin wall)	Easy-Load® II (thick wall)	High-Performance	Easy-Load® II (thin wall)	Easy-Load® II (thick wall)	High-Performance (thick wall)
Number of heads accepted rpm	2 10 to 430		1	2 8 to 360		1
Max torque	20 kg-cm (270 oz-in)					
Reversible	No (CCW from front)					
Voltage/Frequency VAC (Hz) – Phase	115 (60) – 1f			230/400 (50) – 3f		
Current	4.7 A			1.4/0.85 A		
Motor size	190 W (¼ hp)			375 W (½ hp)		
Motor type	Class 1, Div.1 Grp D, Class 2, Div 1, Grp EFG			Eex-d-IIBT4		
Motor/speed control type	Mechanical (zero-max) with lever					
Operating temperature	1 to 40°C (34 to 104°F)					
Storage temperature	–45 to 60°C (–49 to 140°F)					
IP rating	IP55					
Agency approvals	UL, cUL, CE					
Dimensions (L x W x H)	56 cm x 34.6 cm x 22.3 cm (22 <sup>1</sup> / <sub>16</sub> " x 13 <sup>5</sup> / <sub>16</sub> " x 8 <sup>3</sup> / <sub>4</sub> "					
Shipping weight	27.4 kg (61 lb)	28.2 kg (62 lb)	28.2 kg (62 lb)	27.4 kg (61 lb)	27.4 kg (61 lb)	28.2 kg (62 lb)

**Flow Curves**  
**P/S EASY-LOAD® II Pump Head**

